

12

EUROPEAN PATENT APPLICATION

21 Application number: 85107485.6

51 Int. Cl.⁴: C 04 B 41/85
 F 16 C 33/04

22 Date of filing: 18.06.85

30 Priority: 20.06.84 JP 125112/84

43 Date of publication of application:
 27.12.85 Bulletin 85/52

84 Designated Contracting States:
 DE GB

71 Applicant: HITACHI, LTD.
 6, Kanda Surugadai 4-chome Chiyoda-ku
 Tokyo 100(JP)

72 Inventor: Hatano, Kazuyoshi
 213-64, Hakari Minorimachi
 Higashiibaraki-gun Ibaraki-ken(JP)

72 Inventor: Miyata, Hiroshi
 2120-4, Motoyoshidacho
 Mito-shi(JP)

72 Inventor: Ohno, Hiromitsu
 6148-155, Shishikura Dejimamura
 Niihari-gun Ibaraki-ken(JP)

72 Inventor: Sugiyama, Kengo
 635-30, Nedo
 Abiko-shi(JP)


72 Inventor: Sato, Mitsuyoshi
 2094-29, Shimoinayoshi Chiyodamura
 Niihari-gun Ibaraki-ken(JP)

74 Representative: Finck, Dieter et al,
 Patentanwälte v. Föner, Ebbinghaus, Finck Mariahilfplatz
 2 & 3
 D-8000 München 90(DE)

54 Sliding contact material.

57 A sliding contact material comprising a porous ceramic
 substrate having the surface pores filled with at least one
 member selected from the group consisting of metals of
 Groups Ib and IVb of the periodic table, graphite, and boron
 nitride.

FIG. 1



SLIDING CONTACT MATERIAL

1 BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

This invention relates to a sliding contact material having a low-friction slide surface, more particularly to a sliding contact material suitable for use in a high temperature region.

RELATED ART STATEMENT

Various sliding contact materials have heretofore been developed for use in a low temperature region, whereas none of those having a low coefficient of friction and suitable for use in a high temperature region has been developed. U.S. Patent 4,123,122, for example, discloses a bearing element comprising a bearing substrate with a porous coating metallurgically spray-bonded thereto, such as aluminum bronze or a ceramic material, which coating is covered with a layer of an adhesive-solid lubricant formulation. Examples of solid lubricants used in the U.S. Patent are ethylene tetrafluoride (C_2F_4), powdered molybdenum disulfide (MoS_2), and powdered graphite, and examples of adhesives used are phenol resins, polyamide-imide resins, and epoxy resins. Such a sliding contact material, however, has a possibility of thermal breakdown because of the insufficient heat resistance of the adhesives. Although a

- 1 heat resistant solid lubricant such as graphite is used,
thermal decomposition of the slide surface of the
element tends to interfere with satisfactory manifestation
of the function. For the reason the element is unsuitable
5 for use in a high temperature region exceeding 400°C,
and its use is limited to a lower temperature region
below 400°C.

SUMMARY OF THE INVENTION

- The primary object of this invention is to
10 provide a sliding contact material capable of maintain-
ing low-friction characteristics in a high temperature
region (400 to 800°C), as well as in a low temperature
region below 400°C.

- The sliding contact material of this invention
15 comprises a porous ceramic substrate, the open pores
of which in the surface (hereinafter referred to as
surface pores) are filled with at least one member
selected from the group consisting of metals of Groups
Ib and IVb of the periodic table, graphite, and boron
20 nitride. As a consequence, the present sliding contact
material is excellent in heat resistance and maintains
its coefficient of friction at a level of about 0.2 or
below even in a high temperature region of 400° to
800°C and the initial coefficient of friction is always
25 mentioned even at a high PV (load x velocity) value
of 35 kg·f·m/cm².

1 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is an exterior view of a fundamental model of the present sliding contact material.

Fig. 2 is an exterior view of an example of the present sliding contact material.

Fig. 3 is an illustrative view of an example of journal-bearing utilizing the present sliding contact material.

Fig. 4 is an illustrative view of another example of journal-bearing utilizing the present sliding contact material.

Fig. 5 is a diagram representing the relationship between the PV value and the coefficient of friction for an example of the present sliding contact material.

Fig. 6 is a diagram representing the relationship between the time of test and the coefficient of friction to demonstrate the durability of the present sliding contact material.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

20 The sliding contact material of this invention is manufactured by filling a lubricant into minute pores open in the surface of porous ceramics. As the lubricant, use is made of metals of Groups Ib and IVb of the periodic table of elements, graphite, or boron nitride
25 (BN). These substances are used singly or in a combination of two or more thereof.

The metals of Group Ib and IVb preferably

1 used in this invention include lead (Pb), copper (Cu),
silver (Ag), and gold (Au). These metals, graphite,
and boron nitride can be used as a compounded mixture
of two or more of these substances to fill the surface
5 pores of ceramic substrates.

As contrasted to ethylene tetrafluoride (C_2F_4)
or molybdenum disulfide (MoS_2), the above-noted lubricants
do not decompose when used in a so-called high temper-
ature region of above $400^\circ C$ and the ceramic sliding
10 contact material of this invention stands long-term
use under high temperature conditions without losing
the function of a lubricated element.

The ceramics suitable for the substrate are
preferably those having a porosity (the percentage
15 ratio in surface areas of pores and ceramic substrate)
of 10 to 95%. If the ratio is below 10%, the surface
area of the pores filled with a lubricant is insufficient,
resulting in an increase in coefficient of friction,
whereas if it exceeds 95%, the mechanical strength of
20 the ceramic substrate becomes insufficient.

The filling of pores with a lubricant is carried
out by vapor deposition, impregnation, or injection under
pressure for metals and graphite, whereas it is carried
out for boron nitride by impregnation, injection under
25 pressure, or spraying together with a volatile liquid.

In filling pores by vapor deposition, impreg-
nation, or spraying, the lubricant may be deposited onto
the entire surface in about 100 \AA thick, as well as onto

1 the pores. However, the lubricant adhered to the areas
free of pores will be eliminated with the use as the
sliding contact material, while the portion of the
lubricant which filled the pores remains as such and
5 contributes to the lubrication.

The reason for the reduction in coefficient
of friction by the filling with the lubricant is such
that the lubricant in the pores expands by the frictional
heat evolved from the sliding contact and forms a thin
10 boundary film of the lubricant.

The suitable ceramics include silicon
carbide (SiC), alumina (Al_2O_3), and silicon nitride
(Si_3N_4).

This invention is illustrated below with
15 reference to the accompanying drawings.

Fig. 1 is a schematic drawing of an example
wherein the surface pores of a silicon carbide element 1
(sintered SiC having a porosity of 50%; the same applies
hereinafter) are filled with graphite 2 by spraying.

20 Fig. 2 shows an example of the sliding contact
material made by filling the surface pores of a silicon
carbide substrate 3 with boron nitride 4 by spraying.

Fig. 3 shows an example of a journal bearing
to support a rotary shaft 5, which employs the sliding
25 contact material shown in Fig. 2.

Fig. 4 shows an example of the sliding contact
material made by embedding a segment 7 of the ceramic
sliding contact material, shown in Fig. 2, into a

1 substrate 6. The substrate material 6 in this case can
be a ceramic material (unfilled) or a common metal
such as stainless steel.

When the sliding contact materials shown in
5 Figs. 3 and 4 both are used in actual run, the boron
nitride expands by the frictional heat (the temperature
reaches about 500°C) and spreads all over the slide
surface, to thereby exhibit the function of a low-
friction sliding contact material excellent in heat
10 resistance.

Fig. 5 is a diagram representing the relation-
ship at ordinary temperature between the coefficient of
friction and the PV value (P = load and V = velocity),
when a sliding contact material is allowed to slide in
15 contact with an aluminum alloy (0.26% Si, 0.2% Fe,
0.08% Mn, 5.2% Mg, 0.07% Cr, by weight, the balance
being Al). In Fig. 5, curves 1, 2 and 3 refer to an
untreated silicon carbide, a silicon carbide substrate
filled with graphite, a silicon carbide substrate filled
20 with boron nitride, respectively. As is apparent from
the Figure, the untreated substrate material shows a
coefficient of friction of 0.30 to 0.35, whereas the
sliding contact materials according to this invention
show that of 0.10 to 0.18 which decreases with the
25 increase in PV value.

Fig. 6 is a diagram representing the relation
between the coefficient of friction and the time, in
hour, of test. Curve 1 refers to the case in which

- 1 untreated silicon carbide substrates (50% pore ratio) are
made to slide in contact with each other. Curve 2
refers to the case in which silicon carbide substrates
filled with graphite are made to slide in contact with
5 each other. As is apparent from curve 2, the sliding
contact material treated according to this invention
shows no increase in coefficient of friction after the
continuous test run for 30 hours, said coefficient remain-
ing at about 0.12.
- 10 A journal bearing of the same structure as
that in Fig. 3 is prepared by filling the surface pores
of a silicon carbide substrate with gold by vapor
deposition. This journal bearing withstands the continuous
use for a period of time as long as 100 hours at a high
15 temperature of 500°C.

As is apparent from the above examples, it is
possible according to this invention to obtain ceramic
sliding contact materials capable of maintaining a small
coefficient of friction of about 0.12 even at a high PV
20 value of $35 \text{ kg}\cdot\text{f}\cdot\text{m}/\text{cm}^2$ or in a high temperature region
of above 400°C.

Since the present sliding contact material
employs no such lubricant as grease, it is suitable
for use in an extremely low temperature region, in an
25 environment where undesirable dust particles are present,
under the conditions that require a maintenance-free
sliding contact material, or under high vacuum.

WHAT IS CLAIMED IS:

1. A sliding contact material comprising a porous substrate material having the surface pores filled with a lubricant, characterized in that said porous substrate material is a ceramic material and said
5 lubricant is at least one member selected from the group consisting of metals of Groups Ib and IVb of the periodic table, graphite, and boron nitride.
2. A sliding contact material according to Claim 1, wherein the metals of Groups Ib and IVb are lead, copper, silver, and gold.
3. A sliding contact material according to Claim 1, wherein the ceramic material is silicon carbide, alumina, or silicon nitride.
4. A sliding contact material according to Claim 1, wherein the porosity of the ceramic material is 10 to 95%.

FIG. 1

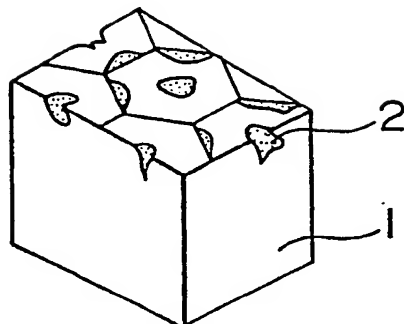


FIG. 2

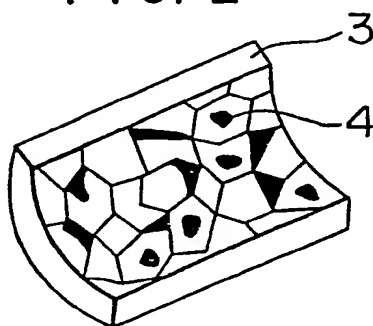


FIG. 3

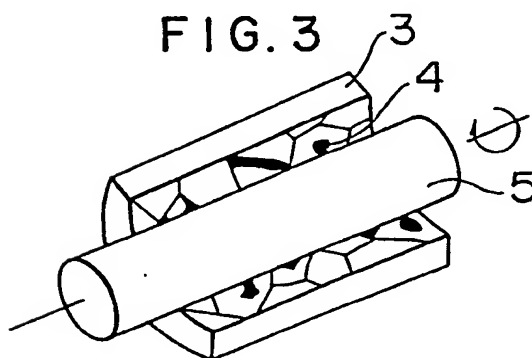


FIG. 4

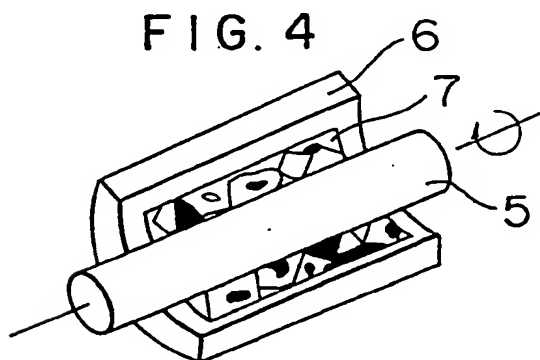


FIG. 5


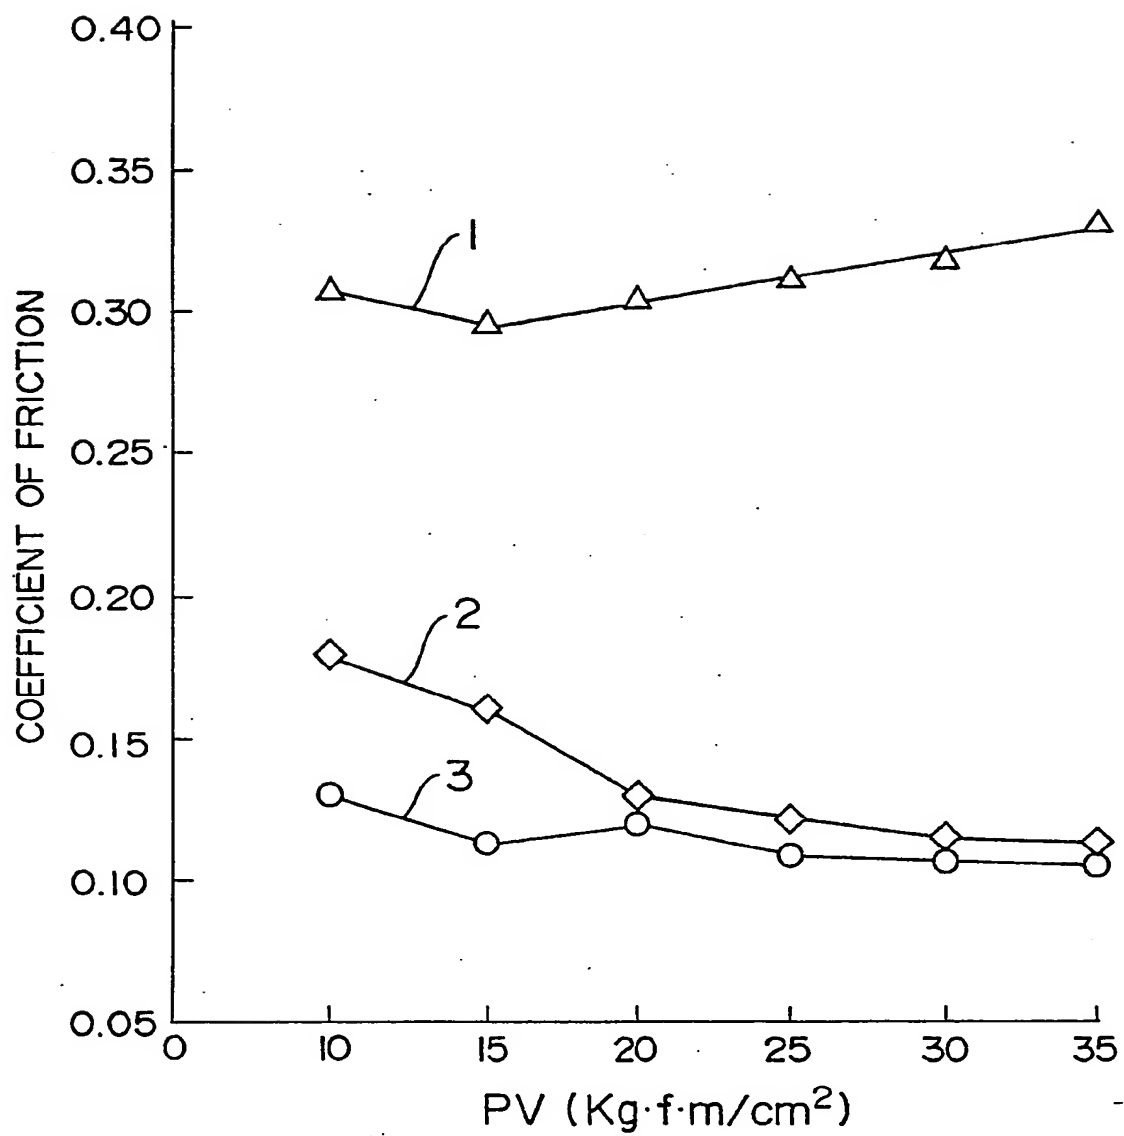


FIG. 6



19

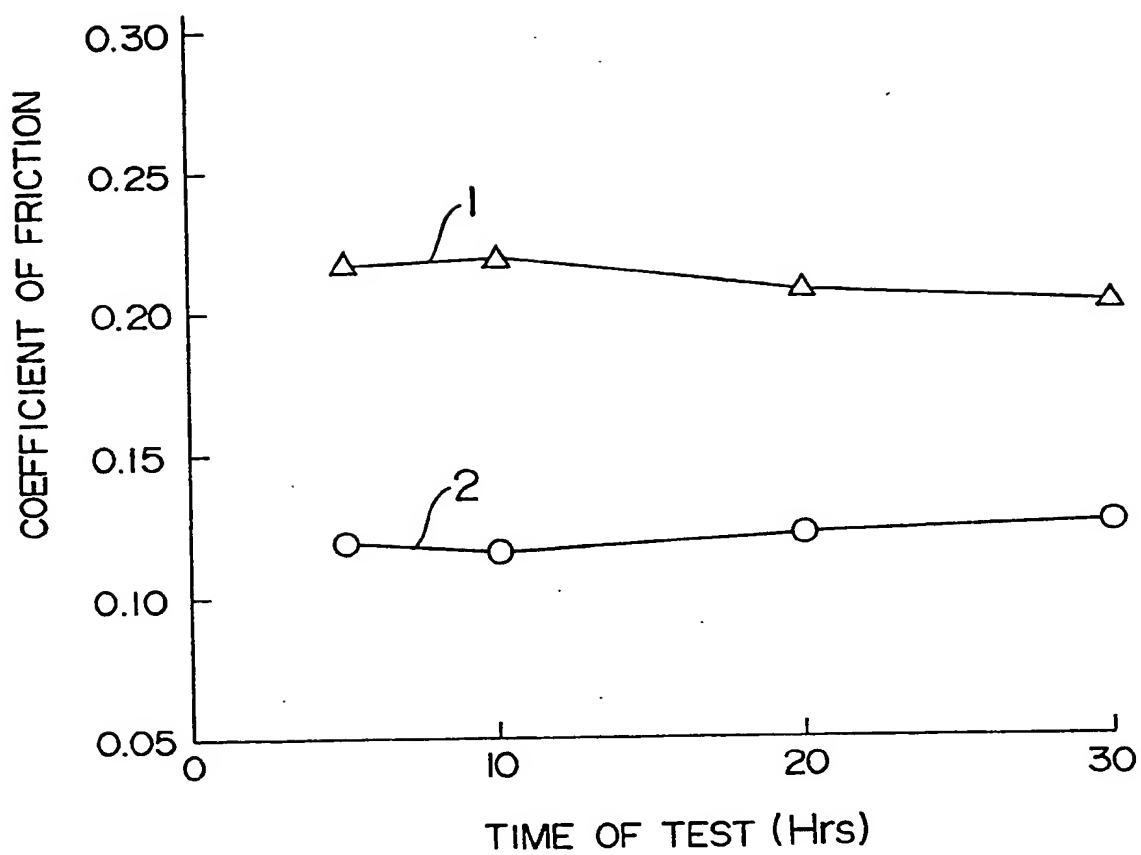

Europäisches Patentamt
European Patent Office
Office européen des brevets

11

Publication number:

0 165 584
A3

12

EUROPEAN PATENT APPLICATION

21 Application number: 85107485.6

51 Int. Cl.³: **F 16 C 33/04**
C 04 B 41/85

22 Date of filing: 18.06.85

30 Priority: 20.06.84 JP 125112/84

43 Date of publication of application:
27.12.85 Bulletin 85/52

88 Date of deferred publication of search report: 22.07.87

84 Designated Contracting States:
DE GB

71 Applicant: **HITACHI, LTD.**
6, Kanda Surugadai 4-chome Chiyoda-ku
Tokyo 100(JP)

72 Inventor: **Hatano, Kazuyoshi**
213-64, Hakari Minorimachi
Higashiibaraki-gun Ibaraki-ken(JP)

72 Inventor: **Miyata, Hiroshi**
2120-4, Motoyoshidacho
Mito-shi(JP)

72 Inventor: **Ohno, Hiromitsu**
6148-155, Shishikura Dejimamura
Niihari-gun Ibaraki-ken(JP)

72 Inventor: **Sugiyama, Kengo**
635-30, Nedo
Abiko-shi(JP)

72 Inventor: **Sato, Mitsuyoshi**
2094-29, Shimoinayoshi Chiyodamura
Niihari-gun Ibaraki-ken(JP)

74 Representative: **Finck, Dieter et al.**
Patentanwälte v. Fünér, Ebbinghaus, Finck Mariahilfplatz
2 & 3
D-8000 München 90(DE)

54 Sliding contact material.

57 A sliding contact material comprising a porous ceramic substrate having the surface pores filled with at least one member selected from the group consisting of metals of Groups Ib and IVb of the periodic table, graphite, and boron nitride.

EP 0 165 584 A3



European Patent
Office

EUROPEAN SEARCH REPORT

0165584
Application number

EP 85 10 7485

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
X	US-A-3 711 171 (S.S. ORKIN et al.) * Claim 1; column 2, line 58 - column 3, line 12 *	1-4	F 16 C 33/04 C 04 B 41/85
X	DE-A-2 165 111 (NIPPON CARBON CO. LTD) * Claims 1-3; page 4, lines 4-9 *	1,2,4	
Y		3	
Y	GB-A-1 382 793 (JOSEPH LUCAS INDUSTRIES LTD) * Claims 1,2 *	3	
X	DE-A-3 329 225 (NGK SPARK PLUG CO. LTD) * Claims 1,4,5,7 *	1,3,4	TECHNICAL FIELDS SEARCHED (Int. Cl. 4) F 16 C 33/00 C 04 B 41/00
Y		2	
Y	DE-A-1 525 077 (EBAUCHES S.A.) * Claims 4-7; figure 3 *	2	
A	DE-A-2 234 924 (VVB ELEKTRISCHE KONSUMGÜTER) * Claim 1; page 1, paragraph 1 *	1,3,4	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 10-04-1987	Examiner HAUCK, H.N.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO Form 1503 03 82